

# Rapid Curing Resin Floor Paint

Rapid curing polyaspartic resin floor paint

BS 8204-6 FeRFA Type 3 High Build Floor Coating

**Industrial Floor Treatments (Stone) Ltd**

PO Box 3701, Stone, Staffordshire, ST15 9ES

Tel: 01785 819800


[enquiries@iftstone.co.uk](mailto:enquiries@iftstone.co.uk)

[www.iftstone.co.uk](http://www.iftstone.co.uk)



**Saturday 4pm**

**Doors Close  
Diamond Grind + 2 Coats**

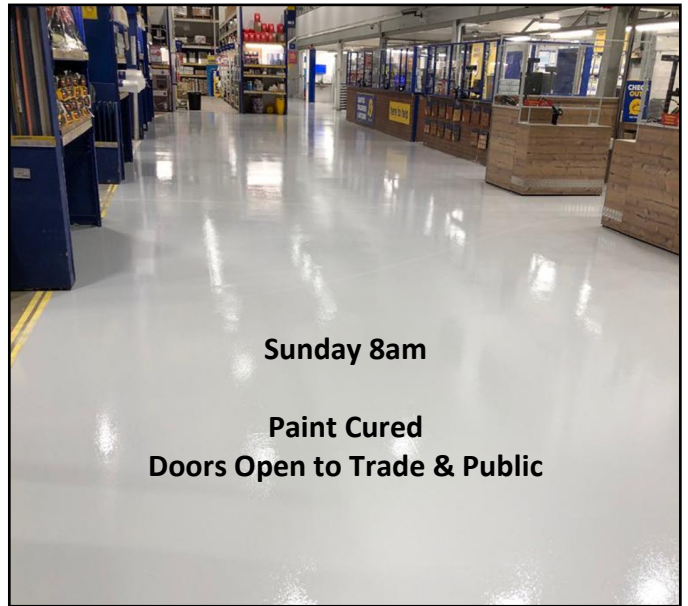

**Sunday 8am**

**Paint Cured  
Doors Open to Trade & Public**

**Builders Merchant - Rapid Curing Polyaspartic Resin Paint - Foot Traffic 1 hour**

Doors Close Saturday 4pm - Doors Open Sunday 8am

## Description

Safety crossing. Rapid curing polyaspartic resin floor paint. Gloss finish. Foot traffic in one hour. Excellent abrasion and chemical resistance. Anti-slip finish available.

## Thickness

0.4mm from two coats - this is equivalent in thickness of up to 10 coats of single pack industrial and garage floor paints.

## Appearance

Gloss finish available in a range of colours.

## Benefits

- Speed. 1 hour to foot traffic. Minimum downtime.
- Speed. 2 hours to pump trucks. Minimum downtime.
- Speed. 3 hours to forklift trucks. Minimum downtime.
- Gloss, easy to clean finish
- Light reflective
- Non dusting.

## Typical Uses

As a hard wearing coloured floor paint in areas such as builders merchants, back of house areas, distribution centres, factories, warehouses, assembly and production areas, workshops, aircraft hangars and storage areas. Excellent wear and chemical resistance

## Traffic

Suitable for regular foot traffic, frequent rubber tyred pump trucks and forklift truck traffic and occasional hard plastic-wheeled trolleys.

## Application Conditions

Ideally the ambient and concrete slab temperature should be 5oC or higher .

## Existing Concrete Floors

The building must be wind and watertight and all surfaces in a clean, sound and dry condition. The floor should not suffer from rising damp and must have an effective damp proof membrane.



Light Grey



Mid Grey



Red



Green



White



Black



Safety Yellow